



Air Cooled Oil Cooler

APPLICATION:

Auxiliary Power Unit (APU) Oil Cooler

PART NUMBER:

60508-000

FUNCTION:

Provides controlled temperature lubricating oil for airborne gas turbine engine

FEATURES:

Fire Resistant Per FAA Advisory Circular 20-135

WHERE USED:

Hamilton Sundstrand/APIC APS 3200 engine used on:

- ✓ Airbus Industrie A318
- ✓ Airbus Industrie A319
- ✓ Airbus Industrie A320
- ✓ Airbus Industrie A321
- ✓ Lockheed Martin C-5



Air Cooled Oil Cooler

SPECIFICATIONS

Weight: 9.8 lbs.(4.4 kg)

Oil Cooled: MIL-L-7808, MIL-L-23699 or MOBIL JET II

Oil Proof Pressure: 750 psig

Performance:




- Oil Flow 9.5 gpm (36 lpm)

- Oil Inlet 300°F (149°C)

- ΔP 30 psi, at 9.5 gpm (36 lpm), 150°F (66°C)

- Heat Rejection 72,000 BTU/HR

Construction: Vacuum brazed aluminum with stainless steel fire shield

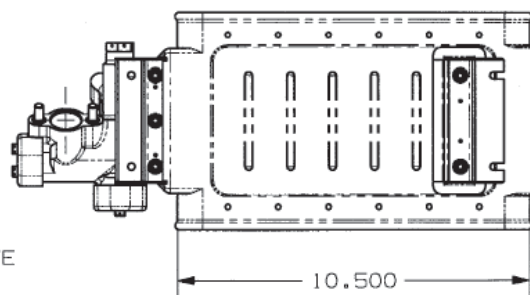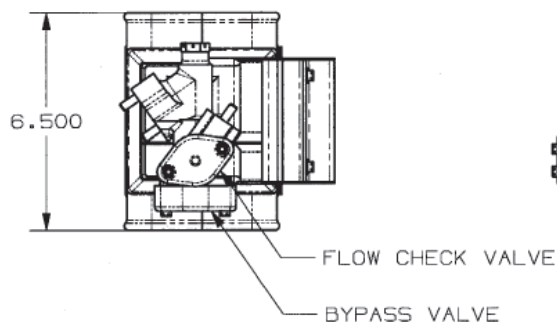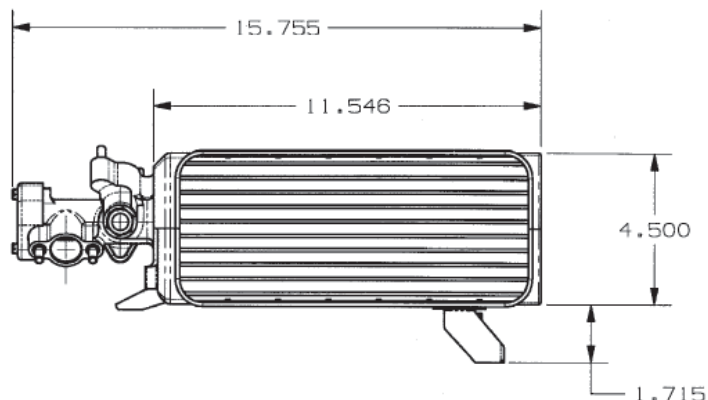

60508-000
OIL COOLER

Dimensions
in Inches

DIMENSIONS

AMETEK®

AEROSPACE & DEFENSE

www.ametekaerodefense.com

HEADQUARTERS

50 Fordham Road • Wilmington, MA 01887 U.S.A.

E-mail: aerosales@ametek.com

SALES:

North America

Tel: 978-988-4771 • Fax: 978-988-4944

Europe

Tel: +(49) 8145 951767 • Fax: +(49) 8145 951768

Asia Pacific

Tel: +(65) 6484 2388 (ext 118) • Fax: +(65) 6481 6588