


Digital Fast Tuning Synthesizer DFS 2000 Series 1 to 20 GHz

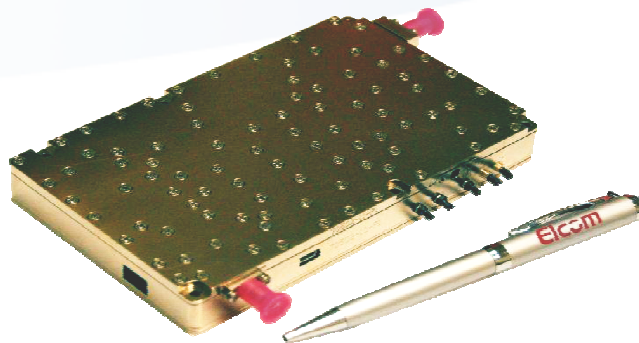


FEATURES

- 1 to 20 GHz in a Single Module (14 cubic inches)
- Ultra Low Phase Noise (-120 dBc, 200 KHz offset from 20 GHz signal)
- -150 dBc Wide Band Noise Floor
- 10 Microseconds Max tuning Speed (Faster Options / ITAR)
- Close in Spurious < -60 dBc
- Step Resolution Options From 10 MHz to 1 Hz
- List and Trigger Sweep
- Small Size Single Module: 5.95 x 3.55 x 0.75 Inches
- VME Version Available

APPLICATIONS

- ES / SIGINT Receivers
- Radar Test
- Flight Line Testers
- Instrumentation

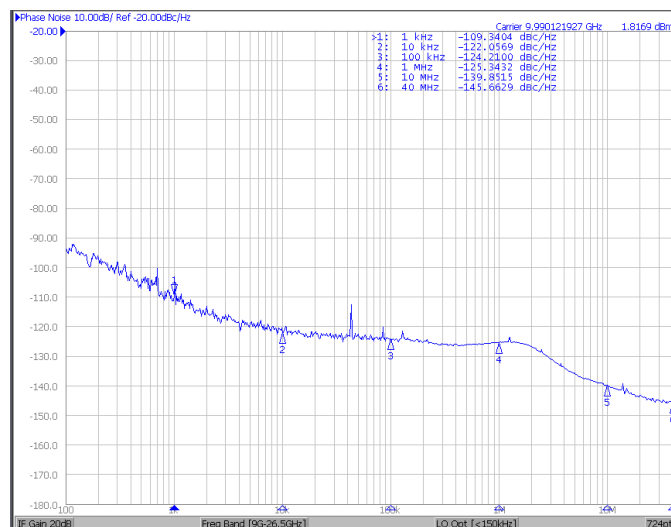

SPECIFICATIONS

Frequency Range:	1 - 20 GHz
Step Size:	1 MHz. 10 MHz to 1 Hz Optional.
Switching Speed	10 microseconds. Contact Factory for faster options.
Output Power	10 dBm +/- 3 dBm
Harmonics	-15 dBc
Subharmonics (10 - 20 GHz only)	-20 dBc
Spurious (< 1 GHz offset)	-60 dBc 10-20 GHz -66 dBc 5-10 GHz -70 dBc 1-5 GHz

Phase Noise (Typical) [dBc]

Frequency [GHz]		1.25 -2.5	2.5-5.0	5.0-10	10-20
1 KHz	offset	-122	-116	-110	-100
10 KHz	offset	-132	-126	-120	-115
100 KHz	offset	-135	-129	-123	-117
1 MHz	offset	-135	-129	-123	-120
10 MHz	offset	-152	-146	-140	-135
Floor		-153	-153	-150	-150


External Reference Input

Frequency	100 MHz
Input Level	6 dBm +/- 3 dBm

DC Supply

+3V / 6V / 20V / -12V	0.4 A / 1.7A / 0.1A / 0.1A
-----------------------	----------------------------

*Optional second module available for +23dBm output power amplification, harmonic / subharmonic filtering and pulse modulation. Contact factory for details.

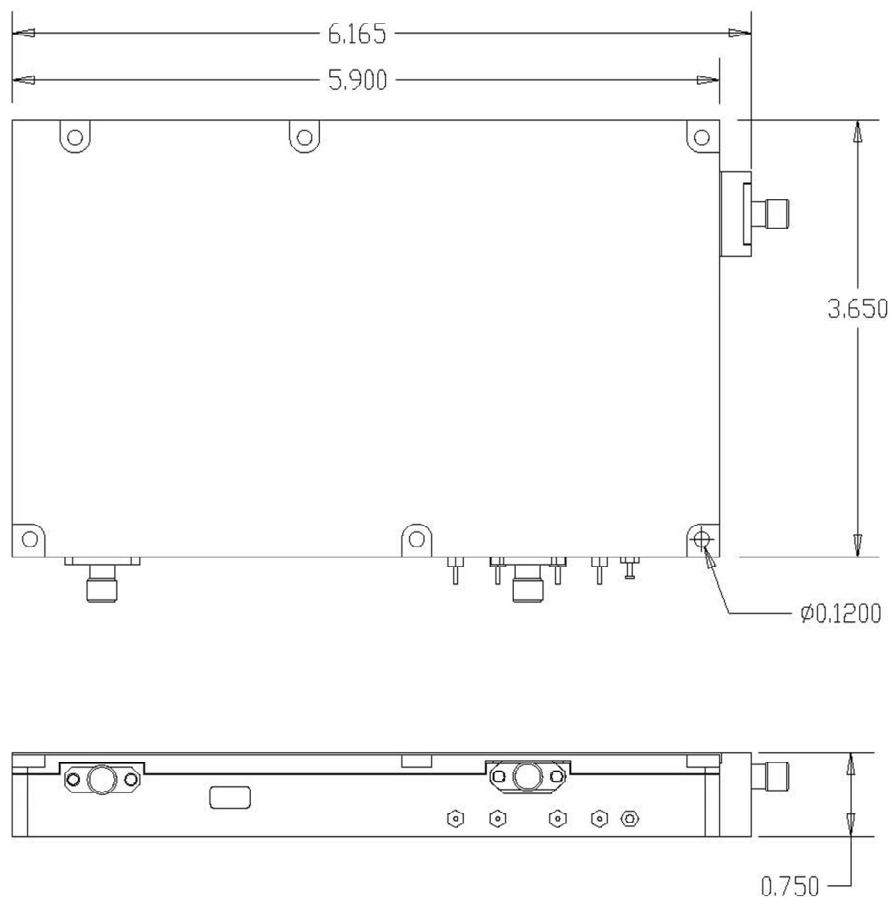

FOR ADDITIONAL INFORMATION CONTACT
sales@elcom-tech.com

****Export of Elcom Technologies products is subject to U.S. export controls. Licenses may be required.**