



Free Convection Fuel Cooled Oil Cooler

APPLICATION:

Commercial Jet
Transport Hydraulic System

PART NUMBER:

11483-000

FUNCTION:


Cools Aircraft's Hydraulic System Fluid with Fuel

FEATURES:

Brazed Tube-Fin Construction

WHERE USED:

✓ Boeing 757, (Similar Designs on 737 & 777)

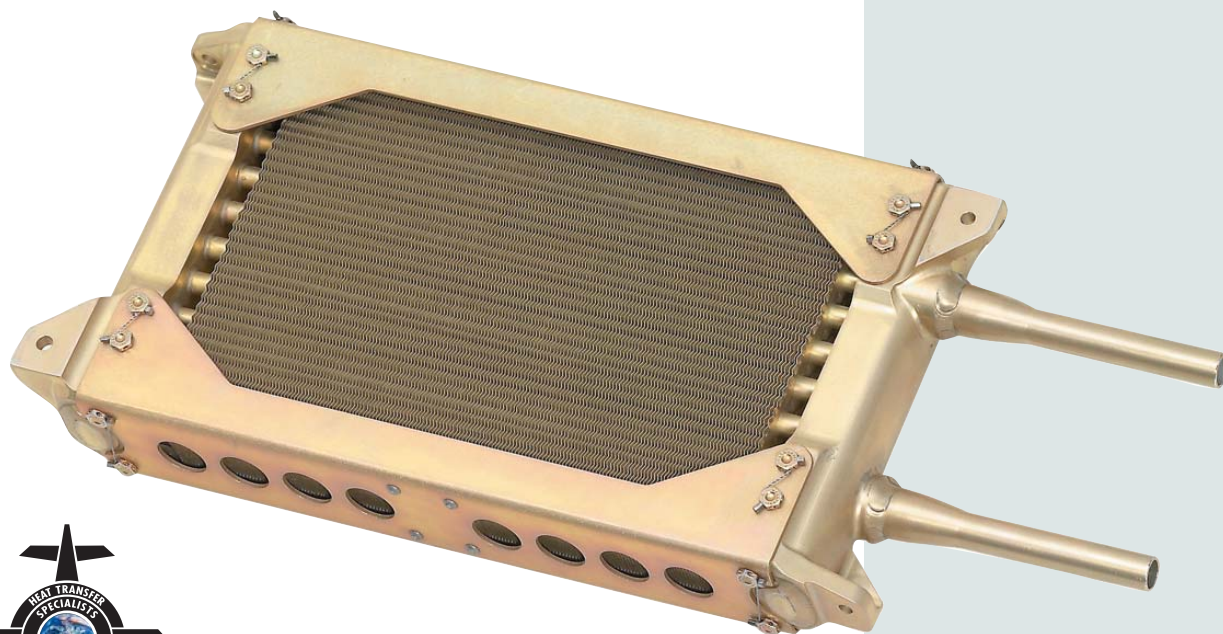

Free Convection Fuel Cooled Oil Cooler

SPECIFICATIONS

Weight: 7.6 lbs. (3.4 kg)

Fluid Cooled: Skydrol Hydraulic Fluid


Fuel: Jet A

Proof Press: 900 psi

Performance:

- Oil Flow: 6.5 gpm (24.61 lpm)
- Oil Inlet: 188°F (87°C)
- Oil Outlet: 165°F (74°C)
- Fuel Temp: 100°F (38°C)

Construction: Aluminum Tube Fin

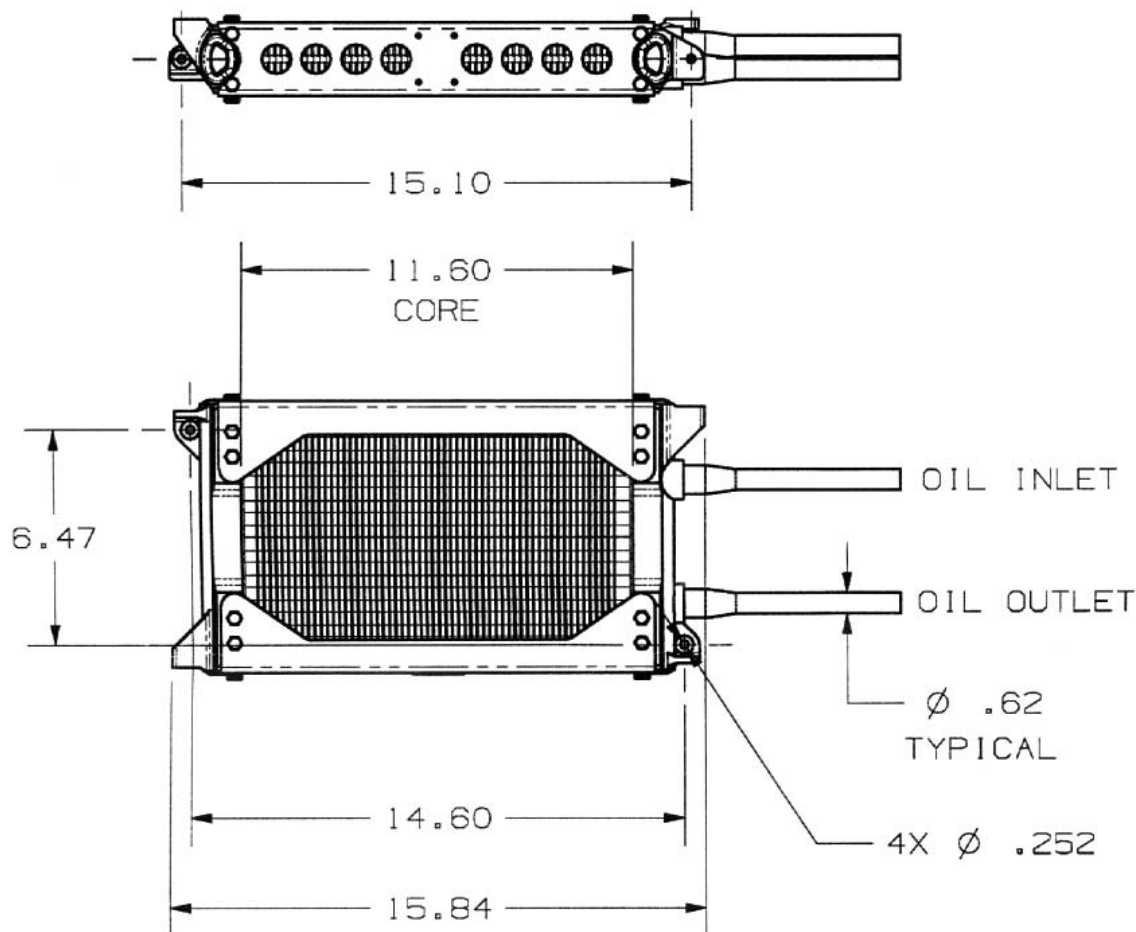

DIMENSIONS

AMETEK®

AEROSPACE & DEFENSE

www.ametekaerodefense.com

HEADQUARTERS

50 Fordham Road • Wilmington, MA 01887 U.S.A.

E-mail: aerosales@ametek.com

SALES:

North America

Tel: 978-988-4771 • Fax: 215-293-8995

Europe

Tel: +(49) 8145 951767 • Fax: +(49) 8145 951768

Asia Pacific

Tel: +(65) 6484 2388 (ext 118) • Fax: +(65) 6481 6588